


Product parameters

|                       | <b>H2400Pro</b>  |        | <b>H2400</b>     |        |
|-----------------------|--|--------|------------------|--------|
| Cell                  | Lithium iron phosphate   |        |                  |        |
| Capacity              | 1843Wh   | 2048Wh | 1843Wh           | 2048Wh |
| AC output power       | 2400W (Peak 4800W)   |        |                  |        |
| Frequency             | 50/60Hz  |        |                  |        |
| USB-A                 | 2*18W  |        |                  |        |
| USB-C                 | 2*100W   |        |                  |        |
| DC output             | 5521*2+Cigarette lighter 120W                                  |        |                  |        |
| Wireless charging     | 10W  |        |                  |        |
| AC charging           | 1200W  | 1500W  | 1200W            | 1500W  |
| Solar charging        | 830W   |        |                  |        |
| Vehicle charging      | 192W   |        |                  |        |
| Parallel operation    | H2400Pro support (rated output 4800W after parallel operation) |        | Does not support |        |
| UPS                   | 10ms   |        |                  |        |
| LED lamp              | 5W   |        |                  |        |
| WIFI/APP              | optional support, APP needs to be customized                   |        |                  |        |
| Safety certification  | UL/FCC/CE/PSE/CP65/ROHS/UN38.3                                 |        |                  |        |
| Discharge temperature | 14 to 104°F (-10 to 40°C)                                      |        |                  |        |
| Charging temperature  | 32 to 104°F (0 to 40°C)  |        |                  |        |
| Storage temperature   | -4 to 113°F (-20 to 45°C)                                      |        |                  |        |
| Net weight            | About 26kg   |        |                  |        |
| Size                  | L433*W300*H288mm   |        |                  |        |

\* Due to the continuous updating of technology, if there is any change in product specification and configuration, please refer to the actual product!

Installation list

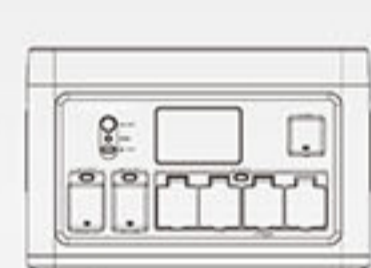

Host



User's manual



AC power cable



MC4 charging line (Optional)



Car charging cable (Optional)



Parallel line (Optional)

|                               |  |
|-------------------------------|--|
| Host                          | According to the requirements of different countries, different voltage and AC output sockets can be customized. |
| User's manual                 | H2400/H2400pro user manual.  |
| AC power cable                | The total length of AC power line is about 1.5 meters.   |
| Car charging cable (Optional) | The car charge is transferred to Anderson charging line, with a total length of about 1.2 meters.                |
| MC4 charging line (Optional)  | MC4 to Anderson charging line, with a total length of about 0.5m.  |
| Parallel line (Optional)      | H2400pro dedicated parallel line.  |

\*Packaging materials can be customized, please consult our business department for details.